

TECHNICAL NOTE



Date: June 2021

ref TN514

Raised by: DB

Distributed to: as required

Soundtracs - Digico(UK) Ltd. unit 10 Silverglade Business Park, Chessington, Surrey KT9 2QL England
Tel: +44 1372 845600 Fax: +44 1372 845656 email: support@digiconsoles.com

Dante firmware update to V4.0.20 (V4.0.10.3) **DQ Rack Compatibility for DMI Dante 64@96**

These instructions will guide you through updating the firmware on the DiGiCo DMI Dante 64@96 to V4.0.20.

This firmware adds compatibility for Control of the **DiGiCo DQ Rack** when using Quantum Software V1454+.

Both A168D & A164D require a firmware update to be compatible with this code. Please See TN515


Please note that this firmware is NOT compatible for Console Versions 1280 or earlier for Control of A168D or A164 IO Boxes. Audio is unaffected.

The update package contains:-


Dante Firmware Update Manager installer (V3.10.5.1) for PC and MAC
DiGiCo V4.0.20 (V4.0.10.3)

Instructions.

1. Unzip the installation package.
2. Run the Dante Firmware Update Manager installer on you PC or MAC. Follow the on screen instructions to complete the installation process.
3. Connect your Dante network to your computer and run Dante firmware Update manager. The welcome screen should appear. Click **Next**
4. On the next page, click **Update Dante Firmware**
5. Now Click **Browse** and navigate to the location of the **DiGiCo 4.0.20.dnt** file.

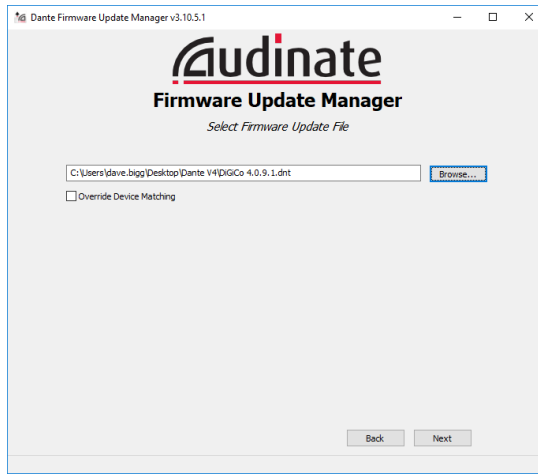

6. Click **Next**. Update Manager will now populate the device list. This may take a minute.

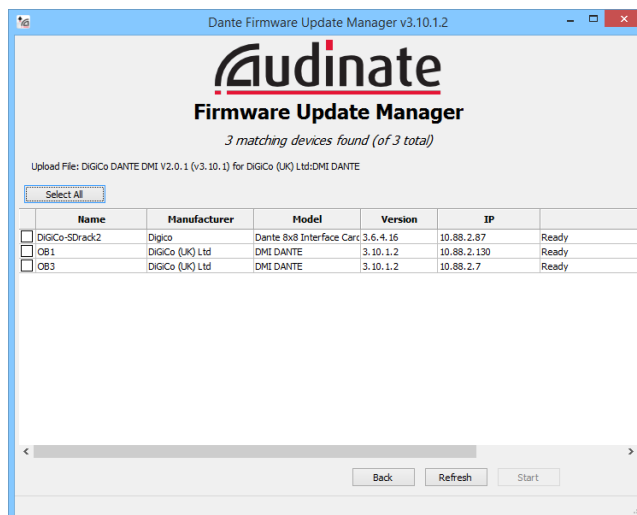

7. Select the device(s) that require the update by checking the tick box and then click **Start**
- Once the upgrade is complete, power cycle all devices before use.